



GK Indicator

The GK offers an affordable indicator that is packed with smart features that will make weighing quick and easy. The built-in check weighing function allows the users to easily view if their samples are above, below or at set targets. With a full keypad, counting applications are achieved with the same indicator, making the GK totally flexible for numerous uses.

The GK comes with a wall-mounted bracket for easy and secure mounting, with the indicator housing made of solid ABS plastic. The bright backlit LCD display features a capacity tracker to show users the total capacity that they have used to prevent potential overloads. The large digits make readings effortless.

Whether using the GK for basic weighing or taking advantage of the parts counting, check weighing or percentage weighing functions, these indicators offer a simple user interface for quick and hassle-free weight readings.



Features


- Vivid, backlit LCD easily visible in any lighting conditions
- Programmable backlight can be set to “always on”, “always off” or “light only when weighing”
- Capacity tracker built into display for easily monitoring possible overloads
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- RS-232 interface for connection to computers and printers
- Solid ABS housing is durable for industrial uses
- Splash-proof housing, keypad and display mean easy cleaning and peace of mind
- Wall-mount bracket for placing indicator on vertical surface
- Checkweighing with audible alarm
- External calibration allows for verification and adjustment with weights
- Parts counting with freely selectable sample sizes
- Parts counting optimisation automatically refines piece weight as parts are added
- Preset tare function speeds the process of repetitive weighing
- Printouts include date and time for data tracking within Good Laboratory Practices (GLP) guidelines
- Programmable for counting to a preset number of parts
- Programmable capacity and readability for a variety of applications
- Quick and easy configuration using the keypad
- Selectable digital filtering for animal/ dynamic weighing delivers stable results for moving subjects
- Zero-tracking feature ensures display returns to zero reading
- Rechargeable battery included for operation virtually anywhere
- Programmable auto power-off to save energy

Applications

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Checkcounting
- Dynamic / animal weighing

Model	GK	GK M
Capacity Range	Selectable	Selectable
Resolution	1:80,000	1:3,000
Loadcell [Excitation Voltage]	5VDC	5VDC
Loadcells [num]	4 x 350ohm	4 x 350ohm
Sensitivity	0.15uv/d	0.15uv/d
Zero Range	0-10mv	0-10mv
Signal Range	0-40mv	0-40mv
Weighing Units	g, kg	
Stabilisation Time (sec)	2	
Interface	RS-232	
IP Rating	55	
Calibration	External calibration	
Display	Backlit LCD with capacity tracker with 20mm-high digits	
Power Supply	Mains power cord / Internal rechargeable battery	
Operating Temperature	-10° to 40°C	
Housing	ABS	
Overall Dim.	260x170x115mm	
Net Weight	2.00kg	
Approvals	N/A	EC type approval / NRCS approved

With more than forty years of experience in the production of balances and scales, professionals worldwide rely on Adam for feature-rich, quality products with best-in-class value - The right balance of speed, performance and value.

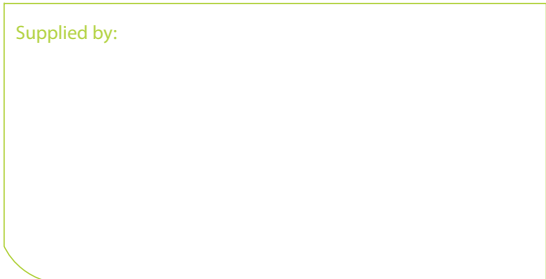

Item number

- 3052010526
- 3126011263
- 3126011281
- 1120011156
- 3074010266
- 3074010507
- 600002028

Description

In-use cover
Thermal paper for item no. 1120011156-ATP printer
Thermal paper for item no. 1120011156-ATP printer (pack of 10)
ATP Adam thermal printer
RS-232 cable (null-modem)
RS-232 to USB Adapter
(must order corresponding RS-232 cable)
Adam DU Software